


Superior durability, High Cost Performance!

NEXTY

FIXED VOLUME PIPETTE

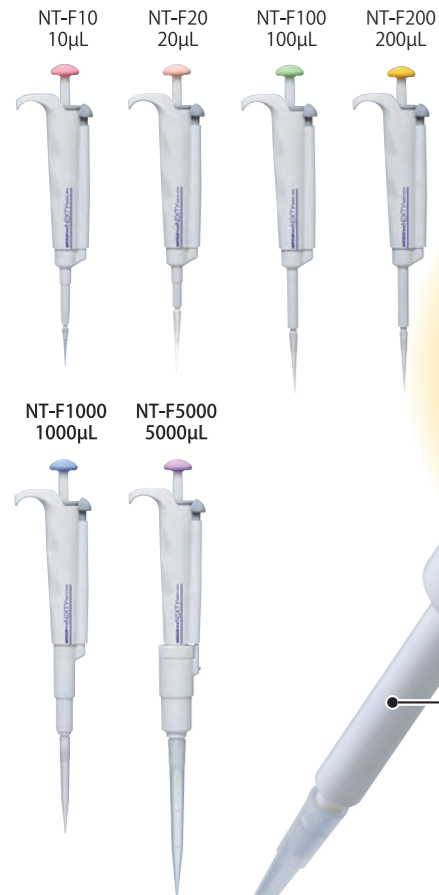

Easy to use mushroom-shaped push button (Color-coded)



Smooth & Steady stroke



Easy to push ejector button



Autoclavable bottom parts



Cat.No.	Item	Volume	Accuracy	Precision	Compatible tip	Packaging
NT-F10	NEXTY-F10 fixed volume pipettor 10 µL	10 µL	± 1.0%	≤ 0.5%	204 / 207	1 unit
NT-F20	NEXTY-F20 fixed volume pipettor 20 µL	20 µL	± 1.0%	≤ 0.5%	703 / 705	1 unit
NT-F100	NEXTY-F100 fixed volume pipettor 100 µL	100 µL	± 0.8%	≤ 0.3%	703 / 705	1 unit
NT-F200	NEXTY-F200 fixed volume pipettor 200 µL	200 µL	± 0.8%	≤ 0.3%	703 / 705	1 unit
NT-F1000	NEXTY-F1000 fixed volume pipettor 1000 µL	1000 µL	± 0.8%	≤ 0.3%	706 / 804	1 unit
NT-F5000	NEXTY-F5000 fixed volume pipettor 5000 µL	5000 µL	± 0.8%	≤ 0.3%	401	1 unit

The Nexty Fixed Volume Pipettor Product lineup
6 models based upon customer's demand.

Something Different.
WATSON BIO LAB
MADE IN JAPAN SINCE 1988

Made in JAPAN

Speedy

Smooth

Slim

Light
Comfortable to use

NEXTY-S

7 types in total

Silent



Something Different.
WATSON BIO LAB
MADE IN JAPAN SINCE 1988
<https://watsonbiolab.com>

Sales agency:
WATSON CO., LTD.
Export Division:
2-2-7 Murotani Nishi-ku Kobe, 651-2241, JAPAN
TEL 81-78-991-4489 FAX 81-78-991-4491
Head Office:
1F, 14-17 Daikanyama-cho, Shibuya-ku, Tokyo,
150-0034, JAPAN
TEL 81-3-5615-3591 FAX 81-3-6427-0740
E-mail:
tcr@watson.co.jp
Manufacturer:
FUKAEKASEI co., LTD.

※The specification and the price etc. of the product might change without a previous notice.

NEXTY-S



Color-coded
NEXTY's push button has different color by each maximum volume.



Eject button
A design that is unobtrusive during dispensing and easy to press during ejection.



Lock lever
Push button and turbo dial's rotation can be locked by this lock lever. Can prevent the deviations in volume setting.



Digital indicator
Scale is easy to look at because display is three digit. Can set 1/1000 volume of maximum.

Autoclavable bottom parts
The nozzle-cone and eject cone can be taken off and autoclaved.

*The nozzle-cone, O-rings, and seal rings can all be autoclaved, which means there's no need to remove the O-rings and seal rings for the autoclaving process.

Speedy! Slim! Light! NEXTY-S

Push-Button
A precise volume setting dial for accurate minimum scale unit setting. (1/1000)



Speedy
Triple Speed Turbo Dial

1 rotation of triple turbo dial is equal to 3.5 rotations of the push-button dial. Quite speedy even when making large volume changes.

Light

Light stroke, Less Fatigue

Light stroke and easy handling reduce repetitive stress on the thumb.



Slim

Slim Body, Easy to Grasp

Thanks to its slim body, those who have small hands can easily grasp it, and it realizes stable dispensing.

Cat. No.	Item	Minimal scale	Volume	Accuracy	Precision	Compatible tip	Packaging
NT-S2	NEXTY-S2 Single Channel pipette 0.2~2μL	0.001 μL	0.2 μL	± 15.0%	≤ 8.0%	204/207	1 unit
			2 μL	± 2.5%	≤ 1.0%		
NT-S10	NEXTY-S10 Single Channel pipette 1~10μL	0.01 μL	1 μL	± 5.0%	≤ 2.5%	204/207	1 unit
			10 μL	± 1.0%	≤ 0.5%		
NT-S20	NEXTY-S20 Single Channel pipette 2~20μL	0.01 μL	2 μL	± 6.0%	≤ 3.0%	705/703/503	1 unit
			20 μL	± 1.0%	≤ 0.5%		
NT-S100	NEXTY-S100 Single Channel pipette 10~100μL	0.1 μL	10 μL	± 2.0%	≤ 1.0%	705/703/503/505/801	1 unit
			100 μL	± 0.8%	≤ 0.3%		
NT-S200	NEXTY-S200 Single Channel pipette 20~200μL	0.1 μL	20 μL	± 2.0%	≤ 1.0%	705/703/503/505/801	1 unit
			200 μL	± 0.8%	≤ 0.3%		
NT-S1000	NEXTY-S1000 Single Channel pipette 100~1000μL	1 μL	100 μL	± 2.0%	≤ 0.6%	706/804/806/805	1 unit
			1000 μL	± 0.8%	≤ 0.3%		
NT-S5000	NEXTY-S5000 Single Channel pipette 500~5000μL	5 μL	500 μL	± 2.0%	≤ 0.6%	401	1 unit
			5000 μL	± 0.8%	≤ 0.3%		

Note: Each pipette is calibrated with the tip denoted in bold. Using other compatible tips may result in slight deviations in performance.