


## No electric power required at all!

**Repetitive Pipette** 



## Aspirate the sample all at once, dispensing its necessary volume repetitively.

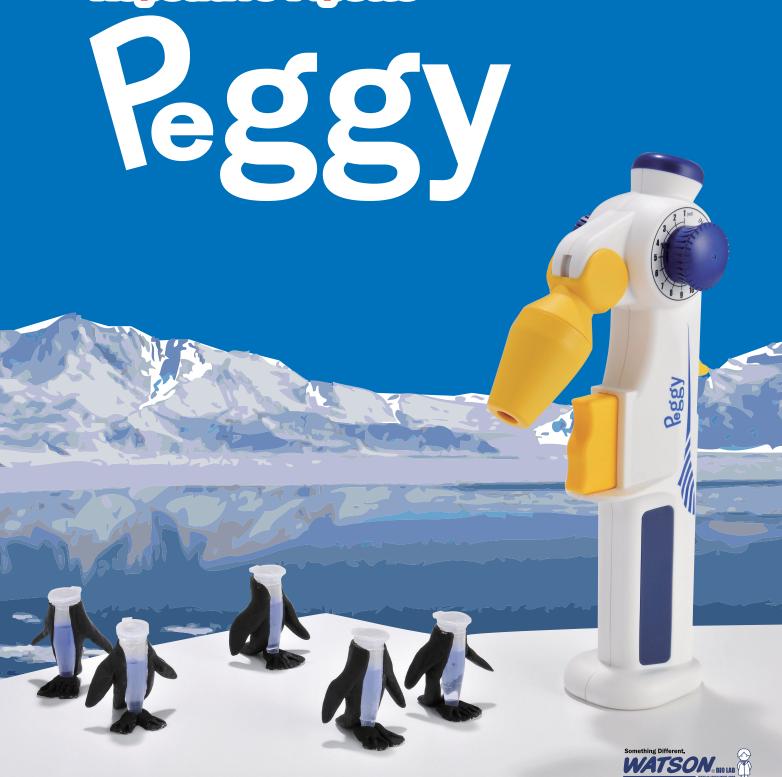

Dispensing button

Push in the aspiration button once slowly until the end to aspirate the set volume.

A single push of the dispensing button dispensed the set volume.

Can also change the dispensing capacity Note once per minute.

Setting aspiration volume

Setting dispensing volume


0.5mL for setting range

0.5 -5mL.

PEGGY-01 Repetitive Pipette "Peggy"

Flexible nozzle-angle

1mL1mL1mL1mL



Aspiration can be set in every 1mL for setting range 1-13mL.

Note: 13mL can be dispensed in case that Watson 10mL Serological Pipette is used.

Cat No.

PG-01



Adjustable nozzle angle in every 10 degrees up 50 degrees.

Simple maintenance



Easy to remove & set spare parts

- Nozzle cover: Autoclavable
- Joint packing: Autoclavable
- water stop filter: Replaceable

lume	Discharge Volume	Packaging	
in.	max. min.		
nl	5 ml 0 5 ml	1 unit / box	

## Precaution in case of using 5mL serological pipette:

Item

https://watsonbiolab.com

Please DO NOT set aspiration volume exceeding 5mL in case that 5mL serological pipette is used. It may cause an accidental liquid suction leading to malfunction on Peggy.



## Sales agency: **WATSON CO., LTD.**

Aspiration Vol

13 mL

**Export Division:** 

2-2-7 Murotani Nishi-ku Kobe, 651-2241, JAPAN

Head Office:

1F, 14-17 Daikanyama-cho, Shibuya-ku, Tokyo,


TEL 81-3-5615-3591 FAX 81-3-6427-0740

E-mail:

tcr@watson.co.jp

Manufacturer:

**FUKAEKASEI** co., LTD.

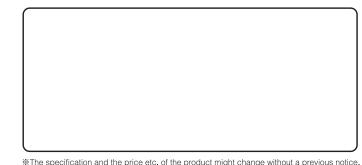

\*The specification and the price etc. of the product might change without a previous notice.